


OVERVIEW

Compaq ProLiant 1600R

BENEFITS AT A GLANCE

- Space-saving rack-mountable form factor (5U)
- 266- or 300-MHz Intel Pentium® II processor (dual processor capability)
- 512-KB second level ECC cache
- 64 MB of EDO ECC DIMM memory, expandable to 512 MB
- 2 PCI and 4 shared PCI/EISA slots (6 total slots)
- Compaq Netelligent 10/100 TX PCI UTP Controller (embedded) on the PCI bus
- Integrated Dual Channel Wide-Ultra SCSI-3 Controller
- Support for up to three 1.6-inch or 1.0-inch hot-plug hard drives
- Internal mass storage capacity up to 54.6 GB (hot-plug)
- I₂O Connector
- Highly Parallel System Architecture for improved system bandwidth
- Integrated Remote Console (IRC)
- Automatic Server Recovery-2 (ASR-2)
- Integrated Management Display (IMD) optional
- Compaq Hot-Pluggable Redundant Power Supply (optional)
- Preinstalled IDE 16X Max¹ CD-ROM drive
- Compaq Insight Manager and SmartStart
- Protected by Compaq Services, including a three-year on-site limited warranty and extended Pre-Failure Warranty² which covers Pentium II processors, memory and disk drives.

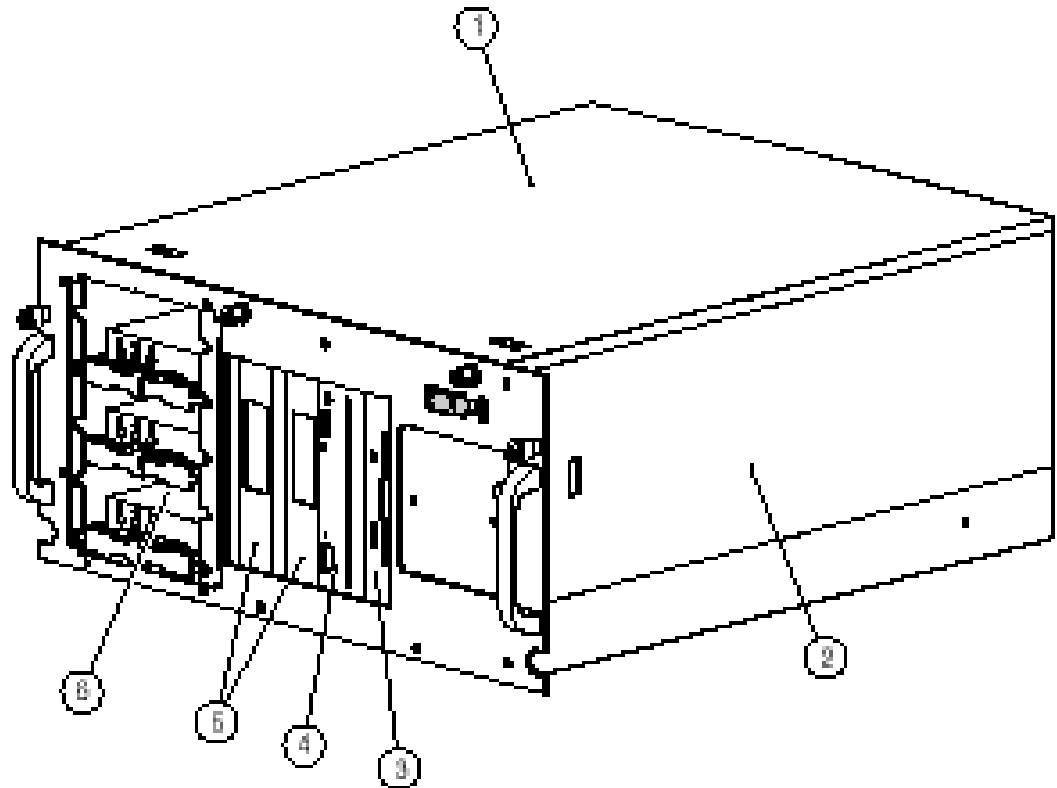

- | | |
|---------------------------|---------------------------------------|
| 1. Top Panel | 4. 16X Max ¹ CD-ROM IDE |
| 2. Side Panel | 5. Two available Removable Media Bays |
| 3. 1.44 MB Diskette Drive | 6. Hot Plug Drive Cage |

¹ Data transfer rate will vary from 150 KB/s to 2400 KB/s.

² Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.